


**M12 MALE 0° WIREABLE SCREW TERM.**

4-pol. max.0,75mm² 4-6mm

Male straight  
M12, 4-pole  
Screw terminals  
Sealing range (cable Ø): 4...6 mm  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

**Illustration**

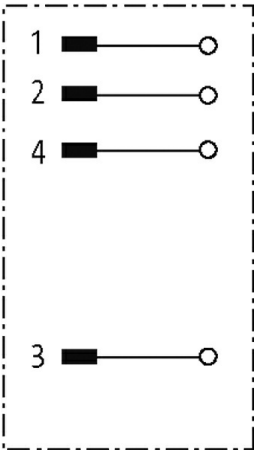

Product may differ from Image

**Approvals**



**Form**

Form 12701

**Technical Data**

Operating voltage	max. 250 V AC/DC
Rated surge voltage	2.5 kV
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	4...6 mm
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing

Protection IP67 inserted and tightened (EN 60529)

**General data**


Pollution Degree	3
Dimensions H×W×D	60×20×20 mm
Temperature range	-40...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879201667
eClass	27279221
Packaging unit	1

**Sketch**

Male

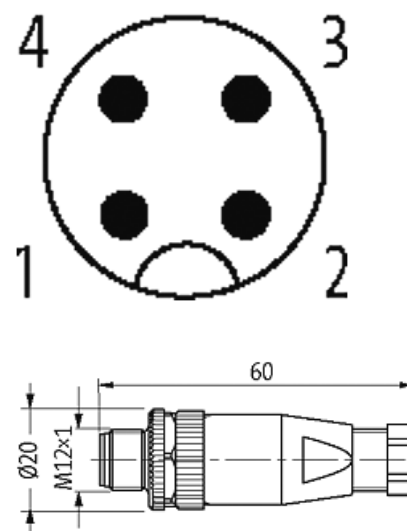

Product may differ from Image